



VEHICLE OVERVIEW

MARTIN JOSE DEL CASTILLO S.
FEBRUARY 25, 2019

MP 500 MODEL 11 PASSENGERS

The best way to move up to 11 passengers.

This fully customizable vehicle is designed for moving large groups quickly, safely and comfortably. It can efficiently pull two tram trailers in all sorts of conditions and climb hills with ease. Its well-balanced design and short turning radius ensure superior maneuverability with responsive steering and braking. Its light-touch accelerator means a smoother ride, while its industrial batteries and cell equalization converter mean more trips per charge. Available in unlimited configurations, including forward-facing or back-to-back seating. Optional wheelchair ramp.



Personnel Carriers, Trams

Other Models : 8 passengers, 6 passengers, Wheelchair, 10 passengers

 PASSENGERS
11

 LOAD CAPACITY
3,000 lbs

 TOWING CAPACITY
6,000 lbs


 SPEED MPH
10 mph

 TURNING RADIUS
145"

FEATURES

- Reinforced bolt-on front and rear bumpers
- Heavy-duty braking power
- Fatigue- and accident-saving ergonomic suspension
- Built-to-last all-steel unibody construction
- Heavy-duty powder paint & protection



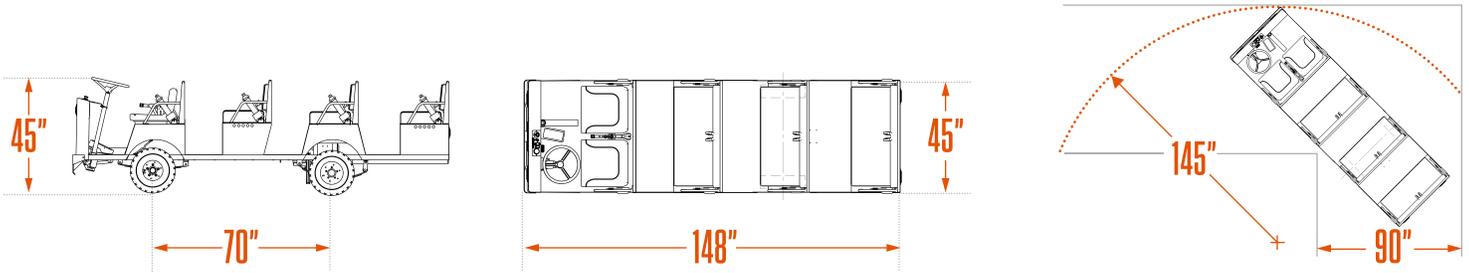

Dimensions

VEHICLE

Height	46"	1,168 mm
Length	n/a	n/a
Width	44"	1,118 mm
Wheel Base	60"	1,524 mm
Ground Clearance	n/a	n/a

DECK

Height	27"	686 mm
Width	44"	1,118 mm
Length	76"	1,930 mm

UNIT WEIGHT

With Batteries	1,650 lbs	748 kg
Without Batteries	n/a	n/a

BATTERIES

Height	n/a	n/a
Length	n/a	n/a
Width	n/a	n/a
Weight - Min	n/a	n/a
Weight - Max	n/a	n/a

Performances

VEHICLE

Passengers	11	
Load Capacity	3,000 lbs	1,361 kg
Tow Capacity	6,000 lbs	2,722 kg
Drawbar Pull - Normal	n/a	n/a
Drawbar Pull - Ultimate	n/a	n/a
Speed MPH	10 mph	16 km/h
Turning Radius	145"	3,683 mm

Specifications

POWERTRAIN

Motor	15 hp shunt motor
Controller	Electronic speed controller
Drive Axle	Differential with automotive ring gear
Brakes	Rear hydraulic brakes, 11", regenerative braking
Wheels	5.7x8 LRC pneumatic tires
Transmission	Goodyear Eagle Synchronous drive
Suspension	Dual leaf springs on front and rear
Starter	n/a
Clutch	n/a
Engine	n/a

ENERGY

Voltage	48 Volt
Battery	Eight 6V-220AH batteries
Charger	High-Frequency Charger, improves battery performance, prevents current surge, 50/60HZ, 110/220VAC
Alternator	n/a
Fuel	n/a

CHASSIS

Body	14-G diamond-plate steel body, tubular frame
Color	Security orange or federal yellow
Lights	LED dual headlights & tail/brake lights

OPERATOR COMPARTMENT

Steering	Automotive steering wheel
Seats	Two bucket seats on slide adjusters
Indicators	Battery status indicator
Safety	Deadman seat switch
Accessories	Horn, Bolt-on Front Bumper

Standards

n/a

Vehicle shown may have optional accessories and is provided for illustrative purposes only.
Specifications and standard equipment are subject to change without notice.

POPULAR OPTIONS

GET THE IDEAL VEHICLE FOR THE JOB.
With unlimited configurations, we make customization quick, easy and affordable.

Brakes

360-031 Front hydraulic disc brakes

Driver Area Options

480-020 Digital battery gauge with hour meter (included with AC package when applicable)

Hitches

360-086 Clevis type hitch with safety spring

Lights

360-024 Turn signals with 4-way flashers

Safety Features

360-026 Pole mounted strobe light

Wheels

360-077 500 x 8 solid soft rubber wheels

The list above shows the most popular options for this vehicle. More options are available. To learn more about the MP - 500 - 11 passengers options, please contact your representative. Options, specifications and standard equipment are subject to change without notice.



Martin Jose Del Castillo S.
President

+52 662 210-7808 #104
mj.delcastillo@mmh.com.mx

Mex Material Handling
Los Mayos 13, Parque Industrial
Hermosillo (Sonora)
83299
Mexico



www.motrec.com